



Application

Parking place, corridor, gallery, warehouse, factory, supermarket
Railway/Bus/Metro station, chicken/pig/horse farm
Customized spectrum for vegetable, fruit growing

1. Construction

Innovative design, mitsubishi PC housing with aluminum heat sink with below features: water-proof, dust-proof, damp-proof, vapor-proof, IP66
Optional double-end connection, optional IP68 plug-and-play connection

2. LED & Optics

LM-80 tested SANAN SMD LED (L70 life expectancy>50,000 hours) is adopted.

Customized light spectrum for vegetable and fruit

Light efficacy for total system is up to 125lm/W

3. Drivers

High quality driver with AC90-265V input voltage, 3-year warranty.
Optional TRIAC, 1-10V dimming, motion sensor, emergency solutions
3 years warranty





LED Tri-proof Light



Parameters

	ILS-TP-20W-60-850	ILS-TP-30W-60-850	ILS-TP-40W-120-850	ILS-TP-50W-120-850	ILS-TP-60W-150-850
Power	20 W	30 W	40 W	50 W	60W
Luminous flux	2,500 lm	3,750 lm	5,000 lm	6,250 lm	7,500 lm
Dimension(L*W*H)	L600*W94*H69mm	L600*W94*H69mm	L1200*W94*H69mm	L1200*W94*H69mm	L1500*W94*H69mm
Luminaire efficacy	Up to 125 lm/W				
CCT	2700 K to 6500 K				
CRI	>80				
Input	200-240Vac / 100-277Vac				
Operating temperature	-20 up to +45 °C				
Beam angle	120 degree				
Dimming	1~10Vdc / TRIAC / Motion sensor / Emergency				
IP Rating	IP65				

Dimension

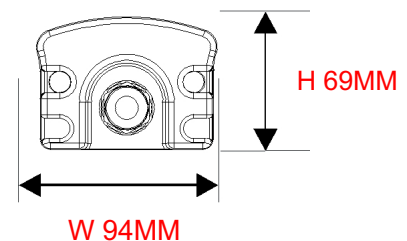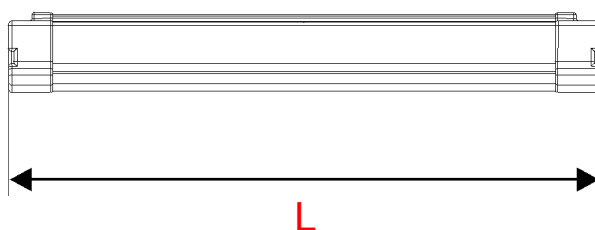


Model	TP-60-20	TP-60-30	TP-120-40	TP-120-50	TP-150-60
L (MM)	600	600	1200	1200	1500

Installation


1. Ceiling mounted

①

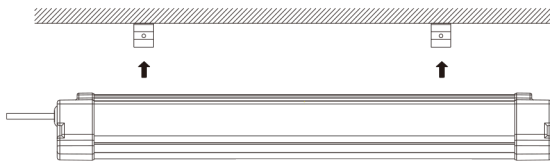


Fix clips on the ceiling and stuck lamp fixture by clips

②

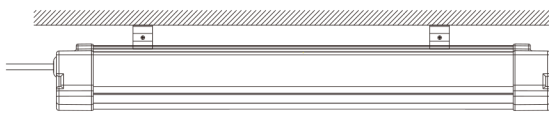


③
Tighten clips with screws




2. Suspended

①

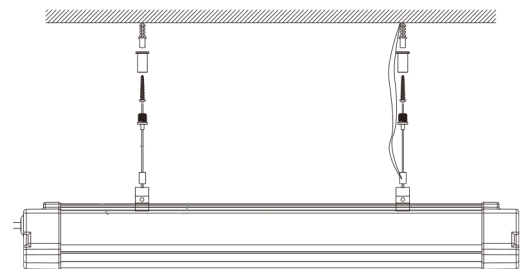

Fix hanging kits on the ceiling and stuck lamp fixture by clips

②



Tighten clips with screws

Mark:

1. Ceiling mounted kits are free and hanging kits are rechargeable.

Package

Model	Qty / Carton	Carton Size	Gross Weight / Carton(kg)
ILS-TP-20W-60-850	6pcs	65*25*21CM	11
ILS-TP-30W-60-850	6pcs	65*25*21CM	11
ILS-TP-40W-120-850	4pcs	125*18*21CM	12
ILS-TP-50W-120-850	4pcs	125*18*21CM	12
ILS-TP-60W-150-850	4pcs	155*18*21CM	15

